

TP8

series



Product Segments


- **Care Motion**

General Features


Transformer type	SMPS
Input voltage	100~240V AC
Max. output	29V DC, 6.25A
Plug support	EU, USA, AUS, UK
Color	Black or grey
IP rating	Up to IP66
Certificate	IEC60601-1, ES60601-1, IEC60601-1-2
Operational temperature range	+5°C~+45°C
Wall mount design	

Drawing


Dimensions with AUS Plug
(mm)

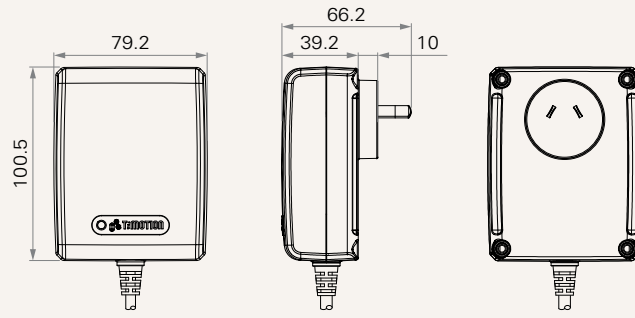


Dimensions with EU Plug
(mm)

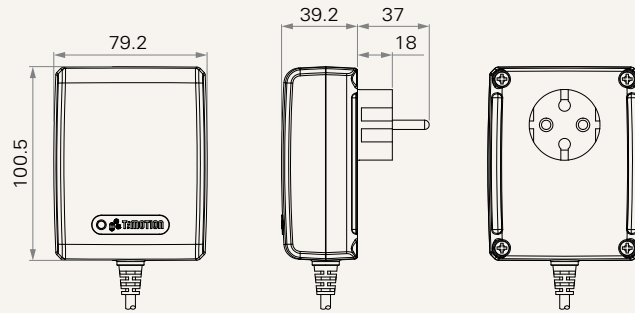

Dimensions with UK Plug
(mm)

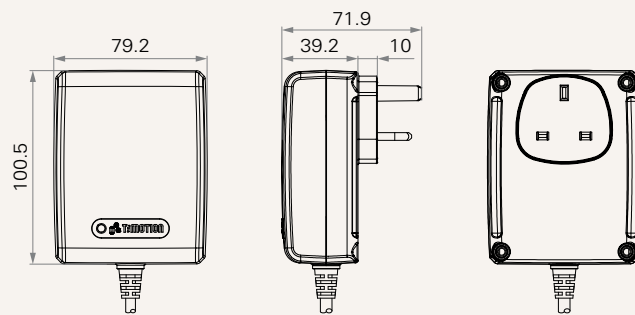

Dimensions with USA Plug
(mm)

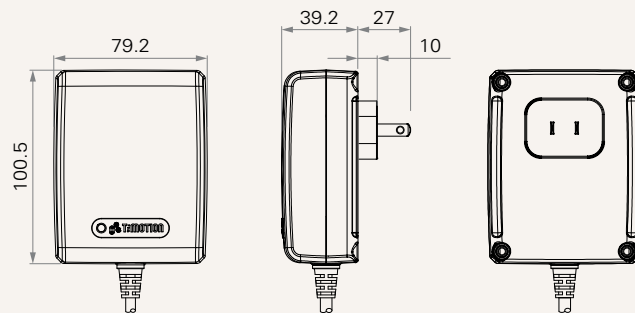

TP8 Ordering Key

TP8

Version: 20240125-G

Plug	1 = EU	2 = USA	3 = AUS	4 = UK
Color	1 = Black	2 = Pantone 428C		
Cable Length and Connector (mm)	1 = Straight, 2000; DIN 5P Female 2 = Straight, 2000; 01P Female 3 = Straight, 4000; DIN 5P Female 4 = Straight, 4000; 01P Female		5 = Curly cable, 1450 (Curly cable length 250); DIN 5P Female 6 = Curly cable, 1450 (Curly cable length 250); 01P Female	
IP Rating	1 = Without	2 = IP54	3 = IP66	

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.