


# VN2

series

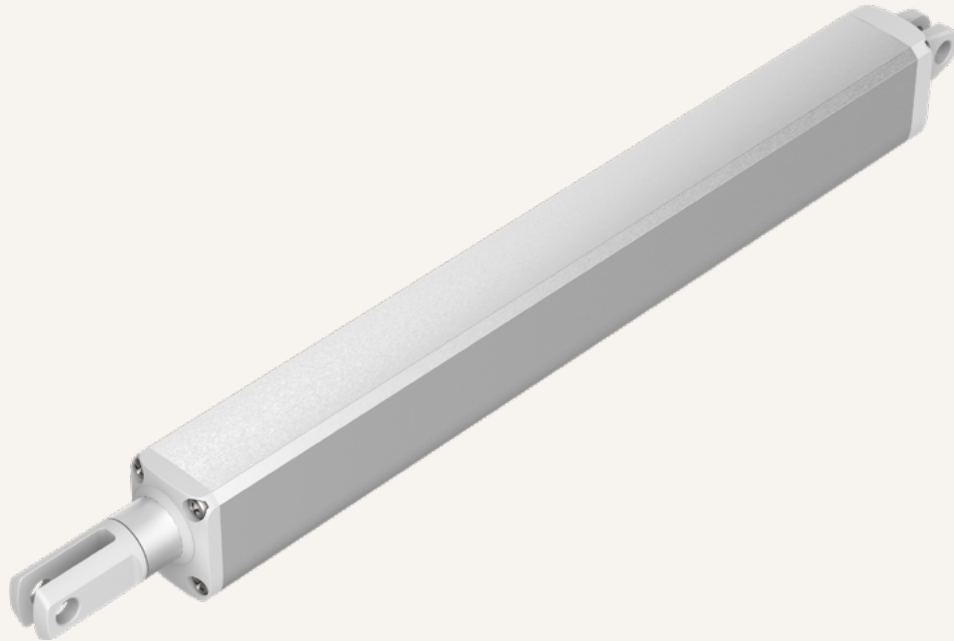

## Product Segments

- **Industrial Motion**


The VN2 series linear actuator is designed specifically for ventilation applications to help remove smoke, heat, and toxic gases from buildings quickly in the event of a fire. It is also designed to generate a minimum smoke layer in the lower parts of a room. The VN2 is made of high-quality aluminum, suitable for applications like fall-through protection systems and greenhouses. The VN2 is currently equipped with either a 12V or 24V DC motor.

### General Features

Max. load	500N (push / pull)
Max. speed at max. load	8mm/s
Max. speed at no load	10.8mm/s
Retracted length	≥ Stroke + 189mm
IP rating	IP66
Stroke	20~500mm
Output signals	NPN Hall sensors
Voltage	12/24V DC; 12/24V DC (thermal switch)
Operational temperature range	-25°C~+65°C
Operational temperature range at full performance	+5°C~+45°C

## Drawing

Standard Dimensions  
(mm)

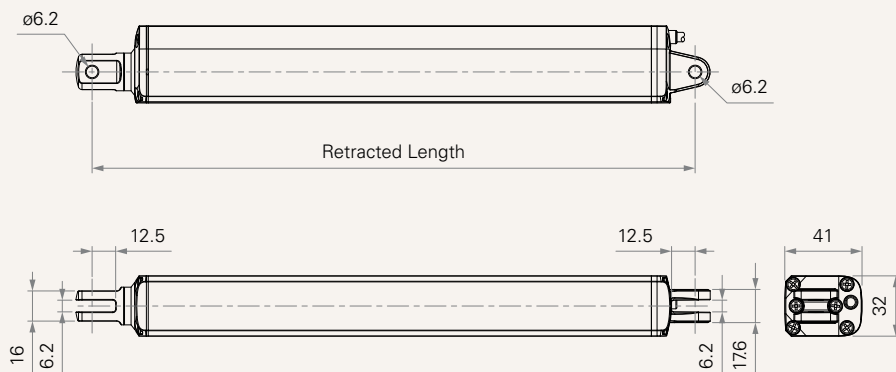

## Load and Speed

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load 24V DC	With Load 24V DC	No Load 24V DC	With Load 24V DC
<b>Motor Speed (5200RPM, Duty Cycle 20%:2min on/8min off)</b>							
<b>B</b>	500	500	500	0.7	1.1	10.8	8.0

## Note


- 1 Please refer to the approved drawing for the final authentic value.
- 2 This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- 3 The current & speed in table are tested with 24V DC motor. With a 12V DC motor, the current is approximately twice the current measured in 24V DC; speed will be similar for both voltages.
- 4 The current & speed in table are tested when the actuator is extending under push load.
- 5 The current & speed in table and diagram are tested with a stable 24V DC power supply.
- 6 Standard stroke: Min.  $\geq 20$ mm, Max. please refer to below table.

CODE	Load (N)	Max Stroke (mm)
<b>B</b>	$\leq 500$	500


**Performance Data (24V DC Motor)**

Motor Speed (5200RPM, Duty Cycle 20%:2min on/8min off)

Speed vs. Load

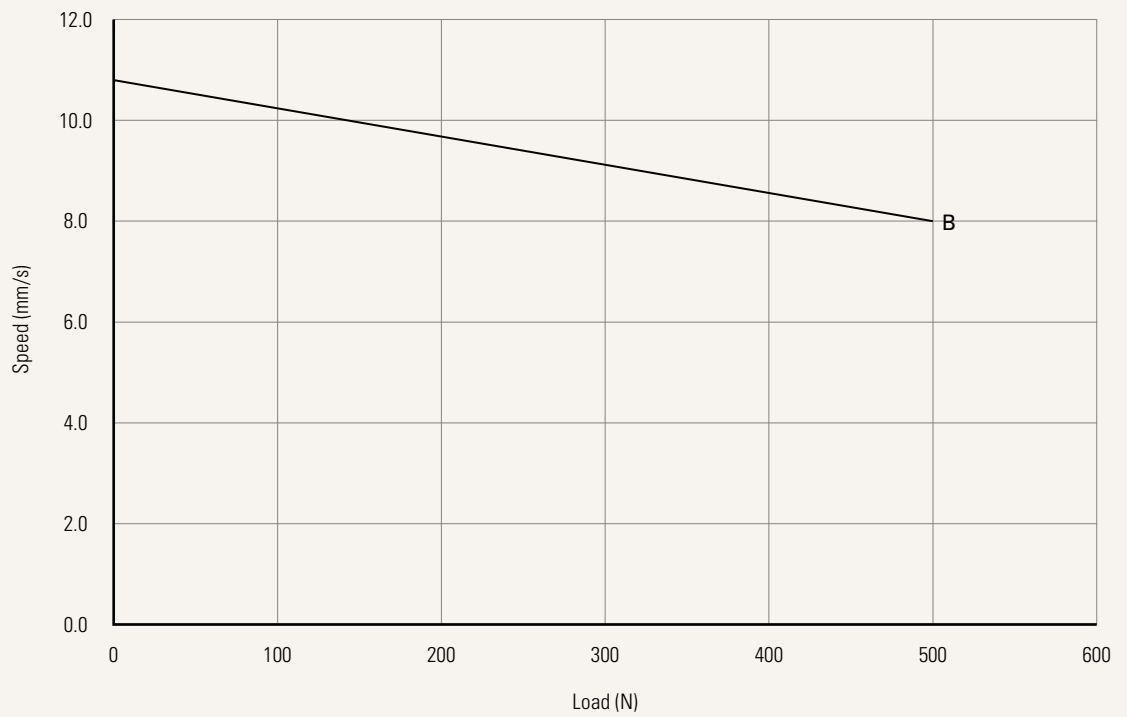

Current vs. Load

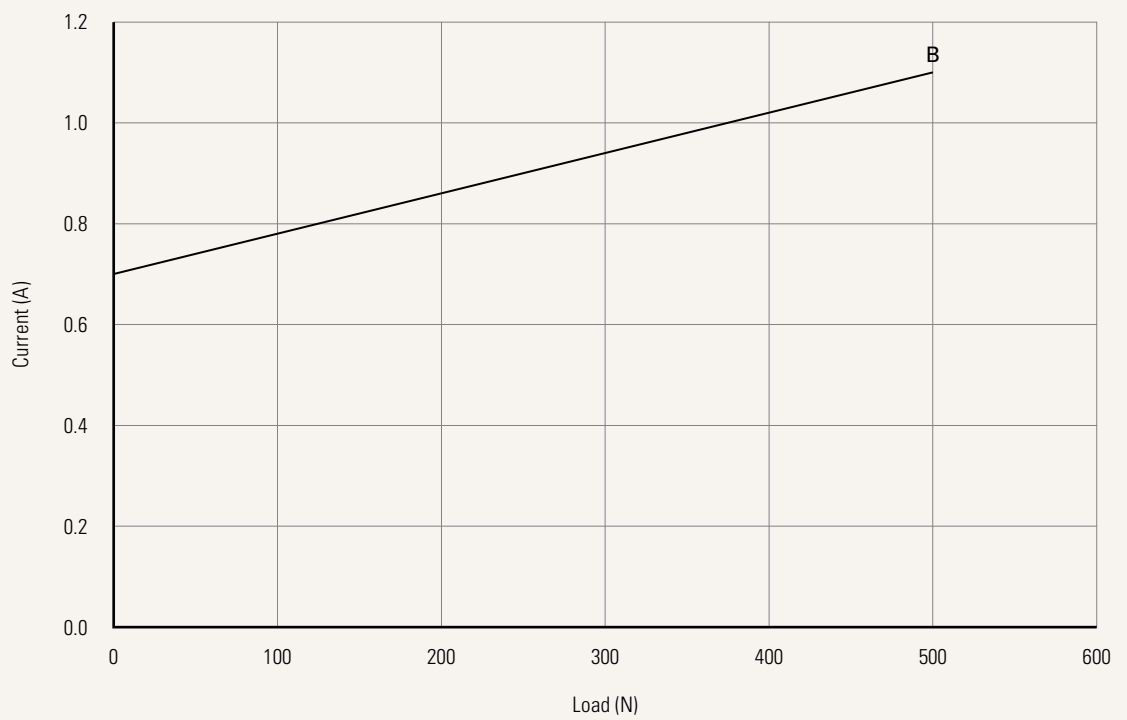

<b>Voltage</b>	1 = 12V DC	2 = 24V DC	3 = 12V DC, thermal switch	4 = 24V DC, thermal switch
<b>Load and Speed</b>	<a href="#">See page 2</a>			
<b>Stroke (mm)</b>	<a href="#">See page 2</a>			
<b>Retracted Length (mm)</b>	<a href="#">See page 5</a>			
<b>Rear Attachment (mm)</b>	1 = Plastic, slotless, hole 6.2		3 = Plastic, U clevis, slot 6.2, depth 12.5, hole 6.2	
	2 = Plastic, slotless, hole 8.2		4 = Plastic, U clevis, slot 6.2, depth 12.5, hole 8.2	
	<a href="#">See page 6</a>			
<b>Outer Tube Adjustable Clamp Block</b>	0 = Without (Option when choosing rear attachment #1, #2, #3, #4)			
<b>Trunnion Mount Bracket</b>	0 = Without (Option when choosing rear attachment #1, #2, #3, #4)			
<b>Front Attachment (mm)</b>	1 = Aluminum, slotless, hole 6.2		4 = Plastic, U clevis, slot 6.2, depth 12.5, hole 8.2	
	2 = Aluminum, slotless, hole 8.2		5 = Plastic, U clevis, slot 6.2, depth 22.5, hole 8.2	
	3 = Plastic, U clevis, slot 6.2, depth 12.5, hole 6.2			
	<a href="#">See page 6</a>			
<b>Direction of Rear Attachment (Counterclockwise)</b>	2 = 0°			
<b>Color</b>	0 = Standard			
<b>IP Rating</b>	1 = Without	2 = IP54	3 = IP66	
<b>Special Function of Spindle Set</b>	0 = Without			
<b>Function of Limit Switches</b>	1 = Two micro switches cut off the actuator at end of stroke			
	3 = Two micro switches send signal at end of stroke			
<b>Output Signal</b>	0 = Without	N = NPN Hall sensor*2		
	<a href="#">See page 6</a>			
<b>Connector</b>	1 = DIN 6P, 90°plug	C = Y cable (direct cut, water proof, anti-pull)		
	2 = Tinned leads			
	<a href="#">See page 7</a>			
<b>Cable Length (mm)</b>	0 = Without	2 = 1000	4 = 2000	B-H = Cable length for direct cut system,
	1 = 500	3 = 1500	5 = 5000	<a href="#">See page 7</a>

## Retracted Length (mm)


1. Calculate  $A+B = Y$
2. Retracted length needs to  $\geq \text{Stroke}+Y$

A.	
Front Attach.	Rear Attach.
	1, 2, 3, 4
1, 2	+189
3, 4	+200
5	+210


B.	
Stroke (mm)	
20~150	-
151~200	+2
201~250	+2
251~300	+2
301~350	+12
351~400	+22
401~450	+32
451~500	+42

## Rear Attachment (mm)


1 = Plastic, slotless, hole 6.2




2 = Plastic, slotless, hole 8.2



3 = Plastic, U clevis, slot 6.2, depth 12.5, hole 6.2




4 = Plastic, U clevis, slot 6.2, depth 12.5, hole 8.2




## Front Attachment (mm)


1 = Aluminum, slotless, hole 6.2




2 = Aluminum, slotless, hole 8.2




3 = Plastic, U clevis, slot 6.2, depth 12.5, hole 6.2



4 = Plastic, U clevis, slot 6.2, depth 12.5, hole 8.2



5 = Plastic, U clevis, slot 6.2, depth 22.5, hole 8.2



## Wiring Definition

### Signal Output


### Pin / Color

● 1 / Green    ● 2 / Red    ○ 3 / White    ● 4 / Black    ● 5 / Yellow    ● 6 / Blue


Signal	Output	Pin / Color	Pin / Color	Pin / Color	Pin / Color	Pin / Color	Pin / Color
0	Without	Extend+	-	-	-	Retract+	-
N	Hall sensor	Extend+	VCC (5V DC)	Hall 1	Com	Retract+	Hall 2

## Connector


1 = DIN 6P, 90° plug



2 = Tinned leads



C = Y cable (direct cut, water proof, anti-pull)

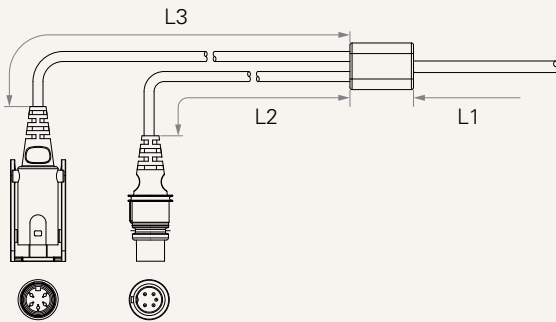

**Cable Length for Direct Cut System (mm)**

CODE	L1	L2	L3
<b>B</b>	100	100	100
<b>C</b>	100	1000	400
<b>D</b>	100	2700	500
<b>E</b>	1000	100	100
<b>F</b>	100	600	1000
<b>G</b>	1500	1000	1000
<b>H</b>	100	100	1200

## Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.